

12/07/98

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <b>(Small Entity)</b> <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Docket No. 30.1
	Total Pages in this Submission 42

**TO THE ASSISTANT COMMISSIONER FOR PATENTS**

**Box Patent Application**  
**Washington, D.C. 20231**

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING**

and invented by:

**Alvin C. Allen, Jr.**

jc549 U.S. PTO  
 09/206627  
 12/07/98

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 22 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications *(if applicable)*
  - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
  - d. ☐ Reference to Microfiche Appendix *(if applicable)*
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings *(if drawings filed)*
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Small Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
**30.1**

Total Pages in this Submission  
**42**

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*  
a. ☐ Formal      b. ☒ Informal      Number of Sheets 10
4. ☒ Oath or Declaration  
a. ☒ Newly executed *(original or copy)*      ☐ Unexecuted  
b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*  
c. ☒ With Power of Attorney      ☐ Without Power of Attorney  
d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission *(if applicable, all must be included)*  
a. ☐ Paper Copy  
b. ☐ Computer Readable Copy  
c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & documents)*
9. ☐ 37 CFR 3.73(b) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing  
☐ First Class      ☒ Express Mail *(Specify Label No.):* EE323917417US

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
30.1

Total Pages in this Submission  
42

## Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures (please identify below):


## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	33	- 20 =	13	x \$9.00	\$117.00
Indep. Claims	3	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$380.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$497.00

- ☒ A check in the amount of **\$497.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **50-0778** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: December 7, 1998

  
Signature

Howard L. Speight  
Reg. No. 37,733  
Two Memorial City Plaza  
820 Gessner, Suite 1360  
Houston, Texas 77024

CC:

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) AND 1.27 (c)) - SMALL BUSINESS CONCERN**Docket No.  
**30.1**

Serial No.

Filing Date

Patent No.

Issue Date

**December 7, 1998**Applicant/ **Alvin C. Allen, Jr.**

Patentee:

Invention: **APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING**

I hereby declare that I am:

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN: Global Trak, Inc.ADDRESS OF CONCERN: 1003 U.S. Highway 90, Liberty, Texas 77575

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 37 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the above identified invention described in:

- ☒ the specification filed herewith with title as listed above.  
☐ the application identified above.  
☐ the patent identified above.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed on the next page and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 CFR 1.9(c) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ no such person, concern or organization exists.  
☐ each such person, concern or organization is listed below.

FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME \_\_\_\_\_  
 ADDRESS \_\_\_\_\_

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Alvin C. Allen, Jr.

TITLE OF PERSON SIGNING


OTHER THAN OWNER: President

ADDRESS OF PERSON SIGNING:

SIGNATURE



DATE:

December 4, 1998   
December 7, 1998

364021 2390250

**APPLICATION**

**FOR**

**UNITED STATES LETTERS PATENT**

**TITLE:**            **APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING**

**APPLICANT:**     **ALVIN C. ALLEN, JR.**

"EXPRESS MAIL" Mailing Label Number EE 323917417US

Date of Deposit December 7, 1998  
I hereby certify under 37 CFR 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office To Addressee" with sufficient postage on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Susan B. Jensen  
Susan B. Jensen

**APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING**

**Field of the Invention**

5           This invention relates generally to location reporting apparatus and methods. More particularly, this invention relates to location reporting apparatus and methods that use the Global Positioning Satellite System ("GPS") to ascertain an object's location. Even more particularly, this invention relates to location reporting apparatus and methods that are triggerable and that report their location derived from GPS signals, via telemetry.

10                           **Background of the Invention**

             Frequently, people use credit to purchase consumer items, such as automobiles, televisions or computers. The purchasers take possession of the item and take it to their homes or offices and put them into use. They are responsible for making periodic payments to the creditor, the person or entity that extended the credit, to pay off the loan.

15       The creditor retains a lien on the property and is also known as a "lien-holder".

             In today's mobile society, people frequently move from one location to another. When they move, they typically take their possessions, including those possessions covered by a lien held by the lien-holder. Sometimes when they move they stop making their periodic payments to the lien-holder, perhaps believing that they no longer have to  
20       make payments and that the lien-holder will not be able to locate them.

             Further, some people simply move a possession, such as an automobile, covered by a lien, in order to hide it from the lien-holder when they stop making payments.

             In either case, the lien-holder is faced with having to locate and take possession of the item covered by the lien. At times, such a process can be expensive, time consuming,  
25       and even dangerous, requiring the lien-holder to hire investigators to locate the debtor and, hopefully, the item covered by the lien.

             Stolen items present a similar challenge. In the case of automobiles, thieves can steal a car, take it to a "chop shop", or a specially outfitted body shop where the automobile is dismantled into salable parts in just a few hours. The traditional response

to an automobile theft is to report the theft to the police who then do their best to find the automobile before it is dismantled.

Other consumer items can be dismantled or otherwise placed into an underground market within just a few hours of their theft. Alternatively, such items can be removed to  
5 the thief's home, where they are hidden from the eyes of the police or other investigators.

Even people are subject to being "stolen", or kidnapped. Again, the traditional response is to report a missing person to the police and other law enforcement agencies who then conduct a search for the missing person.

### **Summary of the Invention**

10 Upon receipt of a page or the occurrence of another triggering action, the invention determines its location using GPS signals and reports the location via cellular or satellite telemetry. The telemetry is routed to a service provider, which takes an appropriate action, such as informing the lien-holder of the location of the object covered by the lien.

15 In general, in one aspect, the invention features a triggerable location-reporting apparatus comprising a trigger signal, a GPS processor coupled to the trigger signal, a position signal carrying position information generated by the GPS processor in response to the trigger signal, a telemetry transmitter coupled to the position signal, and a telemetry transmit signal transmitted by the telemetry transmitter, the telemetry transmit  
20 signal carrying the position information.



Implementations of the invention may include one or more of the following. The apparatus may include a power supply connection, a first switchable power signal coupled to the GPS processor and the power supply connection, and a second switchable power signal coupled to the telemetry transmitter and the power supply connection. The apparatus may include a controller configured to switch on and off the first switchable power signal and the second switchable power signal. The apparatus may include a power supply coupled to the power supply connection. The power supply may comprise a battery, a solar cell or a vehicle battery. The page receiver, GPS processor and telemetry transmitter may be housed in a housing. The housing may be configured to be installed in a vehicle. The housing may comprise at least a portion of an article of clothing. The housing may be configured to be installed in an object to be tracked. The telemetry transmitter may comprise a cellular telemetry transmitter. The telemetry transmitter may comprise a satellite telemetry transmitter, a cellular telephone, or a radio-telephone. The trigger signal source may comprise a page receiver, the trigger signal activating when the page receiver receives a page. The trigger signal source may comprise an alarm or a remote control.

In general, in another aspect, the invention features a method for reporting a location for an object comprising receiving a page; determining, in response to the page, the location of the object using GPS signals; transmitting the location of the object via telemetry.

Implementations of the invention may include one or more of the following. The method may include applying power to a GPS receiver and a cellular telemetry transmitter upon receipt of the page, and disconnecting power from the GPS receiver and the cellular telemetry transmitter upon transmission of the location of the object. The method may include receiving the transmitted location at a gateway and communicating the transmitted location to a service provider. The method may include transmitting the location of the object via cellular telemetry or via satellite telemetry. The method may

include determining if the object is moving and continuing to transmit the location of the object while it is moving. The method may include storing the location of the object and transmitting the stored location of the object if the ability to determine location ceases.

In general, in another aspect, the invention features a triggerable location-

5 reporting apparatus comprising a location-signal generating device and a telemetry transmitter coupled to the location-signal generating device. The apparatus may comprise a GPS processor. The apparatus may comprise a page receiver and a page signal generated by the page receiver and coupled to the GPS processor. The GPS processor may generate the location signal in response to the page signal. Power may be withheld  
10 from the GPS processor until the apparatus receives a page. Power may be withheld from the telemetry transmitter until the apparatus receives a page. The telemetry transmitter may comprise a cellular telemetry transmitter or a satellite telemetry transmitter.

#### **Brief Description of the Drawings**

Fig. 1 is a block diagram of a system incorporating one embodiment of the  
15 invention.

Fig. 2 is a block diagram of one embodiment of the apparatus according to the invention.

Fig. 3 is a flow chart of the power management feature.

Fig. 4 is a block diagram of the controller.

20 Fig. 5 is a block diagram of the formatter.

Fig. 6 is a representation of the data received from the GPS receiver by the data selector.

Fig. 7 is a representation of the data output from the data selector.

Fig. 8 is a block diagram of the power controller.

25 Fig. 9 is a block diagram of an embodiment of the controller.

Fig. 10 is a block diagram of an embodiment of a system incorporating the invention.

Fig. 11 is a plan drawing of a panic switch according to the present invention.

Fig. 12 is a block diagram of an alternative embodiment of the present invention.

Fig. 13 is a perspective drawing of the invention incorporated in articles of clothing.

### **Description of the Preferred Embodiments**

An object 10, such as an automobile, contains a triggerable location-reporting apparatus 12, as shown in Fig. 1. The apparatus 12 is most likely hidden somewhere in the automobile, and may even be integrated into the body or the engine. For example, the apparatus may be integrated into the automobile's Primary Computer Module. The apparatus can either be connected to the power source associated with the object, such as the automobile battery, or it may have a self-contained power source or sources, as further discussed below.

The apparatus 12 receives a page from the paging satellite 14 preferably initiated by personnel or some automatic device located at the service provider 16. The page request can be initiated from any source. The service provider 16 accepts requests from customers to locate objects that have been lost, stolen or otherwise hidden. For example, a lien-holder 18 may request that the service provider 16 locate an object for which the debtor has fallen into default. The service provider's response is to send a page to the apparatus 12.

The page need not originate in the paging satellite 14 but can originate in any system capable of sending out pages. For example, a cellular network may be capable of sending out pages and could be used instead of the paging satellite 14. Further, the system need not use a page to communicate between the service provider 16 and the apparatus 12 but can use any system that allows the service provider 16 to uniquely address the apparatus 12 via a broadcast signal. For example, very low frequency signals or HF radio signals could be used to communicate between the service provider 16 and the apparatus 12.

When the apparatus 12 receives the page it determines its location and direction of movement by accessing the signals of the GPS system 20, which comprises a plurality of satellites 22 broadcasting signals which can be used to determine an object's location and heading anywhere on the earth. The apparatus 12 then formats the location information into a cellular telemetry stream and transmits it via the cellular system's telemetry channels.

In the AMPS (Advanced Mobile Phone System) cellular system, which is the analog cellular system used in the United States, each cellular base station has 832 channels. The 832 channels are divided among at least two competing cellular carriers. Each cellular carrier uses 21 of the 416 channels to carrying control signals. Each control channel includes a Forward Control Channel (FOCC) and a Reverse Control Channel (RECC).

The cellular base station uses the FOCC to send information to cellular telephones and the cellular telephones send information back to the cellular base station via the RECC. The FOCC and RECC are used to establish a cellular telephone call through a local switch. Once the cellular telephone call is established, the call is moved to one of the non-control channels and the released control channel is made available to establish other cellular telephone calls.

The cellular base station broadcasts a System Identification ("SID") signal, which identifies the cellular system to cellular telephones receiving it. When a cellular telephone is turned on, it compares the SID signal it receives against an SID stored within the telephone, which identifies the cellular telephone's home system. If the received SID is not the same as the stored SID, the cellular telephone is "roaming" and the "roam" indicator on the telephone is illuminated.

Subsequently, the cellular telephone transmits its identity to the cellular base station via the RECC. The RECC transmission includes the telephone's Mobile Identification Number ("MIN"), which is a unique 10-digit number (analogous to a

telephone number including an area code) that is programmed into the cellular telephone.

The first six digits of the MIN identify the cellular telephone's home system. The RECC also includes an Electronic Serial Number ("ESN"), a unique 32-bit serial number permanently stored in the cellular telephone which uniquely identifies the cellular

5 telephone. The cellular base station will receive the MIN and ESN through the RECC and determine that the MIN does not correspond to a local number. Using the MIN, the cellular base station will determine the home system for the cellular telephone and send a validation signal to that system. The cellular local switches in the United States are interconnected through the Intersystem Signaling Network, IS-41, which allows them to  
10 send and receive validation information.

The validation signal, known under IS-41 as a RegistrationNotification Invoke (REGNOT) message, includes the cellular telephone's MIN and ESN. The REGNOT message also includes the identity of the cellular base station sending the message. The cellular telephone's home system will respond with a RegistrationNotification Return  
15 Result (regnot) message. In the regnot message, the cellular telephone's home system will either indicate that it will take financial responsibility for calls made by the cellular telephone or it will refuse to validate the cellular telephone. If validation occurs, a subsequent exchange of messages establishes the features (such as call forwarding) available to the cellular telephone.

20 The validation process just described uses the cellular system's control channels. Again, once a cellular telephone call is initiated the control channel that was used to set up the call is released for other purposes.

At least two companies, Cellemetry and Microburst, have developed systems which allow the transmission of information from a cellular telephone to a gateway using  
25 the validation signals. Cellemetry, for example, connects a Cellemetry Service Gateway to an IS-41 on a local switch and registers an SID on the IS-41 network. Cellemetry radios transmit RECC signals to local cellular base stations. The local cellular base

stations transmit a validation signal to a Cellemetry gateway.

In the RECC signal transmitted from the Cellemetry radio, the MIN normally transmitted in a RECC signal is replaced by a 10-digit equipment identification number, identifying a Cellemetry gateway. The 32-bit ESN normally transmitted can be used as a  
5 “payload” to transmit information from the Cellemetry radio or a device incorporating the Cellemetry radio to the Cellemetry gateway. The Cellemetry gateway strips the payload information from the validation signal and sends it to a service provider.

The Microburst system is similar except that the payload is 55 bits instead of 32.

A similar system is used in digital cellular telephone applications such as CDMA  
10 and TDMA systems.

Returning to Fig. 1, upon receipt of the page from page satellite 14, the apparatus 12 determines the location and direction of movement, if any, of object 10 using the GPS signals from the GPS system 20. The apparatus then formats the location and movement information into the payload portion of a cellular RECC signal and transmits it to a local  
15 cellular base station 24. The MIN portion of the RECC signal may contain a unique MIN or it may be a MIN that is common to all triggerable location-reporting apparatus serviced by a common service provider. Alternatively, the MIN may be different for each of the apparatus.

The cellular base station 24 determines that the apparatus 12 is a roamer and  
20 passes a validation signal into the IS-41 system 25 via a local switch 26. The common MIN will cause the cellular base station to direct the validation signal to a gateway 28. The gateway 28 receives the validation signal and reads the payload data and provides it to the service provider 16. The gateway may also use the information regarding the cellular base station that originated the validation signal to determine an approximate  
25 location of the cellular telephone and pass that information on to the service provider 16 as well. A company such as Cellemetry or Microburst may provide the gateway or it may be provided by the service provider 16.

The gateway will preferably respond to the cellular base station with a regnot message indicating that the requested roamer status has been denied. The cellular base station will then know not to try to allocate a voice channel to the apparatus.

Alternatively, the gateway will not respond to the cellular base station, which will

5 eventually allow the request to expire.

The service provider 16 can now communicate the location of the object 10 to the owner 30, lien-holder 18, or to the police 32.

A block diagram of the apparatus is shown in Fig. 2. A page receiver 34 receives power through controller 36. Preferably, the power is passed directly through the

10 controller 36. Alternatively, the power may bypass the controller entirely and be applied directly to the page receiver 34. A battery 38 supplies power to the controller 36.

Alternatively, an external power source 40 may supply power to the controller 36. As still another alternative, the page receiver 34 may have a pager battery 42 separate from the power supplied to the remaining electronics in the apparatus 12. A separate battery  
15 allows the page receiver 34 to remain in a standby state for a long period of time without draining the power supply for the rest of the apparatus.

When the page receiver 34 receives a page over antenna 44 that is addressed to the page receiver 34, the page receiver 34 transmits a "power-on" signal 46 to the controller 36. The controller 36 then switches power to a global position satellite system receiver  
20 48, which receives GPS signals via antenna 50. The GPS receiver 48 acquires the GPS signals and determines a variety of position data regarding apparatus 12. The GPS receiver sends the GPS data 52 to the controller 36.

The controller 36 buffers and reformats the GPS data into a form acceptable to a cellular network transmitter 54. The controller then switches power to the cellular  
25 network transmitter and sends a "data to transmit" signal 56 to the cellular network transmitter 54. After the cellular network transmitter has had an opportunity to format the "data to transmit" into the payload section of the RECC signal, the cellular network

transmitter 54 transmits the RECC signal, including the GPS payload, via antenna 58. The cellular antenna 58 may be combined with the GPS antenna 50. One or both of these antennas (or their combination) may comprise dielectric and conducting materials embedded in the object or attached to it with an adhesive or some other attachment mechanism.

Preferably, the power-on signal 46 is provided to the controller 36 as the result of a page received by the page receiver 34, as discussed above. Alternatively, an external trigger 60 may provide the power-on indication to the controller 36.

A flow chart of the power management provided by the controller 36 is illustrated in Fig. 3. The apparatus 12 receives a page 62. The page receiver wakes up the controller 64. The controller wakes up the GPS receiver and reads the GPS position information 66. The controller wakes up the cellular network transmitter and sends it formatted position information 68. The transmitter transmits the MIN and the payload to the cellular base station which forwards the data via the RECC transmission to the gateway. The controller then puts the cellular network transmitter and GPS receiver back to sleep 70. The controller then goes back to sleep 72. With this power management approach, significant power is being used only when position information is being transmitted over the cellular network. The rest of the time the only drain on system power is the page receiver, which has a very low power requirement when it is waiting for a page. Even this power drain can be eliminated by using a separate pager battery 42, as shown in Fig. 2.

The controller may store the last location signal it receives from the GPS receiver. Consequently, if the apparatus receives a subsequent page and the GPS receiver cannot perform its function (because, for example, it is shielded from GPS satellite signals), the apparatus will report the stored position. The apparatus may also report the amount of time that has elapsed since the position information was stored.

In another embodiment, the apparatus may turn on a homing beacon 74 (see Fig.



2) if the GPS receiver is unable to perform its function. The homing beacon will allow the object to be tracked by a receiver tuned to the beacon frequency.

A block diagram of the controller is shown in Fig. 4. GPS data 52 is received by a formatter 76 from the page receiver 34 where it is buffered and formatted into a form acceptable to the cellular network transmitter 54. The formatter 76 buffers the reformatted signal and then transmits it as a "data to transmit" signal 56.

A block diagram of the data formatter is illustrated in Fig. 5. GPS data 52 is buffered by a buffer 78. A data selector 80 selects data from the buffered GPS data 52 to be transmitted to the cellular network transmitter 54. A buffer and formatter 82 buffer the selected data and convert it into a format acceptable to the cellular network transmitter 54. A memory 84 may be provided to store the last reported position from the GPS receiver. The properly formatted "data to transmit" signal 56 is then transmitted to the cellular network transmitter 54.

An example of the data selector function is illustrated in Figs. 6 and 7. The Motorola® GT Plus Oncore™ GPS family of chips produces an digital output signal 86 containing bits representing the latitude, longitude, height, velocity, and heading of the apparatus 12 and the current time, as shown in Fig. 6. Similar products manufactured by other companies may be used instead of the Motorola product. Preferably, only the bits representing latitude, longitude, velocity and heading 88 are included in the data to transmit signal 56, as shown in Fig. 7. Preferably, the bits representing height and current time are discarded (although they may be sent in alternative embodiments). Further, it may be desirable to change the order that the various portions of the information are transmitted. For example, it may be desirable to send the heading portion first. The data selector selects the data to be transmitted and arranges it into the desired order.

Returning to Fig. 4, the controller also performs a power management function, as discussed above. Upon receipt of the power-on signal 46 from the page receiver 34, a power controller 90 opens and closes switch 92 to apply and remove power to the GPS

receiver 48. The power controller 90 also opens and closes switch 94 to apply and remove power to the cellular network transmitter 54.

A functional block diagram of the power controller is illustrated in Fig. 8. While Fig. 8 shows the use of delayed action relays it should be understood that any electronics that provide the desired function may be used. The power-on signal from the page receiver is applied to two delayed action relays. Relay 96 engages as soon as the power-on signal is applied, which causes switch 92 to close. Sixty seconds later relay 96 disengages, which causes switch 92 to open. The sixty-second power off delay is adjustable as necessary to allow the GPS receiver 48 sufficient on time to acquire the GPS satellites and determine the location of the apparatus.

Relay 98 actuates 45 seconds after the power-on signal is applied. Again, this delay is adjustable so that power is applied to the cellular network transmitter 54 only after the data to transmit signal 56 has been prepared. The cellular network transmitter 54 is turned off 15 seconds after it is turned on, which allows the cellular network transmitter adequate time to transmit the RECC signal to the cellular base station.

The controller may have the ability to determine when the apparatus is moving. It can accomplish this by comparing the location data from the GPS location signal to the location data stored in the memory 84 or by examining the velocity data reported by the GPS receiver. In either case, the controller may leave the GPS receiver power on when the apparatus is moving. The controller can then cause the location data to be reported from time to time (e.g. every five minutes) through the cellular telemetry network by applying power to the cellular network transmitter for a short period of time. The controller may keep the GPS receiver operational for a period of time after the apparatus stops moving. This allows the apparatus to provide continuous updates on its position while it is moving.

Another implementation of the elements enclosed in the dashed box in Fig. 4 is shown in Fig. 9. A microprocessor system 100 receives the power-on signal 46 from the

page receiver 34. The microprocessor system may include an interconnected microprocessor, program storage area and data storage area. The storage areas may include random access memory ("RAM") and read only memory ("ROM").

Alternatively, the microprocessor system may be implemented entirely with discrete logic elements or application specific integrated circuits ("ASIC"). The microprocessor system may be implemented with a combination of a microprocessor and discrete and ASIC logic elements.

When the microprocessor receives the power-on signal its stored program causes it to assert and un-assert bit outputs 102 and 104 in sequence, as described above. The program may be developed in assembly language, machine language or a higher order language such as C++ or the function of the program may be accomplished with discrete logic or ASICs or a combination of any of these. Preferably, the program is compiled and linked as necessary and stored in one of the storage areas for execution by the microprocessor to accomplish the described functions.

A buffer 106 receives GPS data 52 from the GPS receiver 48 and buffers it. The microprocessor system 100 extracts the buffered data through input 108, selects the data to be sent out as payload and rearranges it as necessary. The microprocessor system outputs the selected and arranged data through output 110 to a buffer/formatter 112, which formats the "data to transmit" signal 56.

Alternatively, the microprocessor system 100 may communicate with the GPS receiver 48, the page receiver 34 and the cellular network transmitter 54 via serial or parallel communication lines 114, 116 and 118, respectively.

An alternative embodiment of the system that does not use the cellular network is illustrated in Fig. 10. In this embodiment, the apparatus 12 communicates its location and heading to the service provider 16 through telemetry communications through satellite 120.

In use, for example in the automobile recovery application, a lien-holder would

contact the service provider and identify an automobile that the lien-holder wants located. The service provider would cause a page to be sent to the apparatus secured within the automobile. The apparatus would receive the page, ascertain its location using the GPS system, and return the location and heading information to the service provider. The service provider could then tell the lien-holder the location and heading of the automobile. Because of the power management feature described above, the service provider could “track” the automobile as it is being driven, providing the lien-holder with multiple readings regarding the automobile’s location. Further, the apparatus may be configured to provide multiple updates of its position while it is moving.

The same function could be supplied with respect to any object, including large-screen televisions, computers or any other item.

The apparatus could be used to provide a “panic switch” capability, as illustrated in Fig. 11. For example, panic switch 122 includes a blue switch 124, a green switch 126, a red switch 128 and a yellow switch 130. Pressing the switches in the correct order (e.g. red, red, green, yellow) will cause the external trigger 60 (Fig. 2) to actuate, causing the position of the panic switch to be reported to through the system illustrated in Fig. 2 to the police or other agency. The police can then query the apparatus 12 located in the panic switch 122 through the service provider in order to track its location if it is moved.

The apparatus could be adapted to respond to alarm conditions associated with an object, such as the traditional car alarm, as illustrated in Fig. 12. For example, when car alarm 132 is tripped, it actuates external trigger 60 (Fig. 2) causing the location of the automobile to be reported via the system shown in Fig. 2. Subsequently, the police, the owner or anyone else with the capability can track the automobile through the service provider by sending pages to the apparatus 12.

The apparatus 12 could be used to locate people, as illustrated in Fig. 13. The apparatus 12 could be hidden in a belt buckle or in the heel of a shoe. Subsequently, if another person became concerned about the location of the person wearing the apparatus,

the concerned person could have the service provider page the apparatus 12 and locate and track it as described above.

The foregoing describes preferred embodiments of the invention and is given by way of example only. The invention is not limited to any of the specific features

5 described herein, but includes all variations thereof within the scope of the appended claims.

What is claimed is:

1 1. A triggerable location-reporting apparatus comprising  
2 a trigger signal;  
3 a GPS processor coupled to the trigger signal;  
4 a position signal carrying position information generated by the GPS  
5 processor in response to the trigger signal;  
6 a telemetry transmitter coupled to the position signal;  
7 a telemetry transmit signal transmitted by the telemetry transmitter, the  
8 telemetry transmit signal carrying the position information.

1 2. The triggerable location-reporting apparatus of claim 1 further comprising  
2 a power supply connection;  
3 a first switchable power signal coupled to the GPS processor and the  
4 power supply connection;  
5 a second switchable power signal coupled to the telemetry transmitter and  
6 the power supply connection.

1 3. The triggerable location-reporting apparatus of claim 2 further comprising  
2 a controller configured to switch on and off the first switchable power  
3 signal and the second switchable power signal.

1 4. The triggerable location-reporting apparatus of claim 2 further comprising  
2 a power supply coupled to the power supply connection.

1 5. The triggerable location-reporting apparatus of claim 4 wherein  
2 the power supply comprises a battery.

1 6. The triggerable location-reporting apparatus of claim 4 wherein  
2 the power supply comprises a solar cell.

1 7. The triggerable location-reporting apparatus of claim 4 wherein  
2 the power supply comprises a vehicle battery.

1 8. The triggerable location-reporting apparatus of claim 1 wherein  
2 the page receiver, GPS processor and telemetry transmitter are housed in a  
3 housing.

1 9. The triggerable location-reporting apparatus of claim 8 wherein  
2 the housing is configured to be installed in a vehicle.

1 10. The triggerable location-reporting apparatus of claim 8 wherein  
2 the housing comprises at least a portion of an article of clothing.

1 11. The triggerable location-reporting apparatus of claim 8 wherein  
2 the housing is configured to be installed in an object to be tracked.

1 12. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a cellular telemetry transmitter.

1 13. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a satellite telemetry transmitter.

1 14. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a cellular telephone.

1 15. The triggerable location-reporting apparatus of claim 1 wherein  
2 the telemetry transmitter comprises a radio-telephone.

1 16. The triggerable location-reporting apparatus of claim 1 wherein  
2 the trigger signal source comprises a page receiver;  
3 the trigger signal activating when the page receiver receives a page.

1 17. The triggerable location-reporting apparatus of claim 1 wherein  
2 the trigger signal source comprises an alarm.

1 18. The triggerable location-reporting apparatus of claim 1 wherein  
2 the trigger signal source comprises a remote control.

1 19. A method for reporting a location for an object comprising  
2 receiving a page;  
3 determining, in response to the page, the location of the object using GPS  
4 signals;  
5 transmitting the location of the object via telemetry.

1 20. The method of claim 19 further comprising  
2 applying power to a GPS receiver and a cellular telemetry transmitter upon  
3 receipt of the page;  
4 disconnecting power from the GPS receiver and the cellular telemetry  
5 transmitter upon transmission of the location of the object.

1 21. The method of claim 19 further comprising  
2 receiving the transmitted location at a gateway;  
3 communicating the transmitted location to a service provider.

1 22. The method of claim 19 wherein transmitting comprises  
2 transmitting the location of the object via cellular telemetry.



- 1 23. The method of claim 19 wherein transmitting comprises  
2 transmitting the location of the object via satellite telemetry.
- 1 24. The method of claim 19 further comprising  
2 determining if the object is moving; and  
3 continuing to transmit the location of the object while it is moving.
- 1 25. The method of claim 19 further comprising  
2 storing the location of the object; and  
3 transmitting the stored location of the object if the ability to determine  
4 location ceases.
- 1 26. A triggerable location-reporting apparatus comprising  
2 a location-signal generating device;  
3 a telemetry transmitter coupled to the location-signal generating device.
- 1 27. The triggerable location-reporting apparatus of claim 26 wherein the location-  
2 signal generating device comprises  
3 a GPS processor.
- 1 28. The triggerable location-reporting apparatus of claim 27 further comprising  
2 a page receiver;  
3 a page signal generated by the page receiver and coupled to the GPS  
4 processor.
- 1 29. The triggerable location-reporting apparatus of claim 28 wherein  
2 the GPS processor generates the location signal in response to the page  
3 signal.

1 30. The triggerable location-reporting apparatus of claim 28 wherein  
2 power is not applied to the GPS processor until the apparatus receives a  
3 page.

1 31. The triggerable location-reporting apparatus of claim 26 wherein  
2 power is not applied to the telemetry transmitter until the apparatus  
3 receives a page.

1 32. The triggerable location-reporting apparatus of claim 26 wherein  
2 the telemetry transmitter comprises a cellular telemetry transmitter.

1 33. The triggerable location-reporting apparatus of claim 26 wherein  
2 the telemetry transmitter comprises a satellite telemetry transmitter.

**APPARATUS AND METHOD**  
**FOR TRIGGERABLE LOCATION REPORTING**

**Abstract of the Disclosure**

A triggerable location-reporting apparatus is disclosed. A trigger signal from a page receiver triggers a GPS receiver to determine the location of the apparatus using GPS signals. The resulting GPS signal is transmitted by a telemetry transmitter, such as a cellular network telemetry transmitter.

06/03/2007 2:09:00 PM

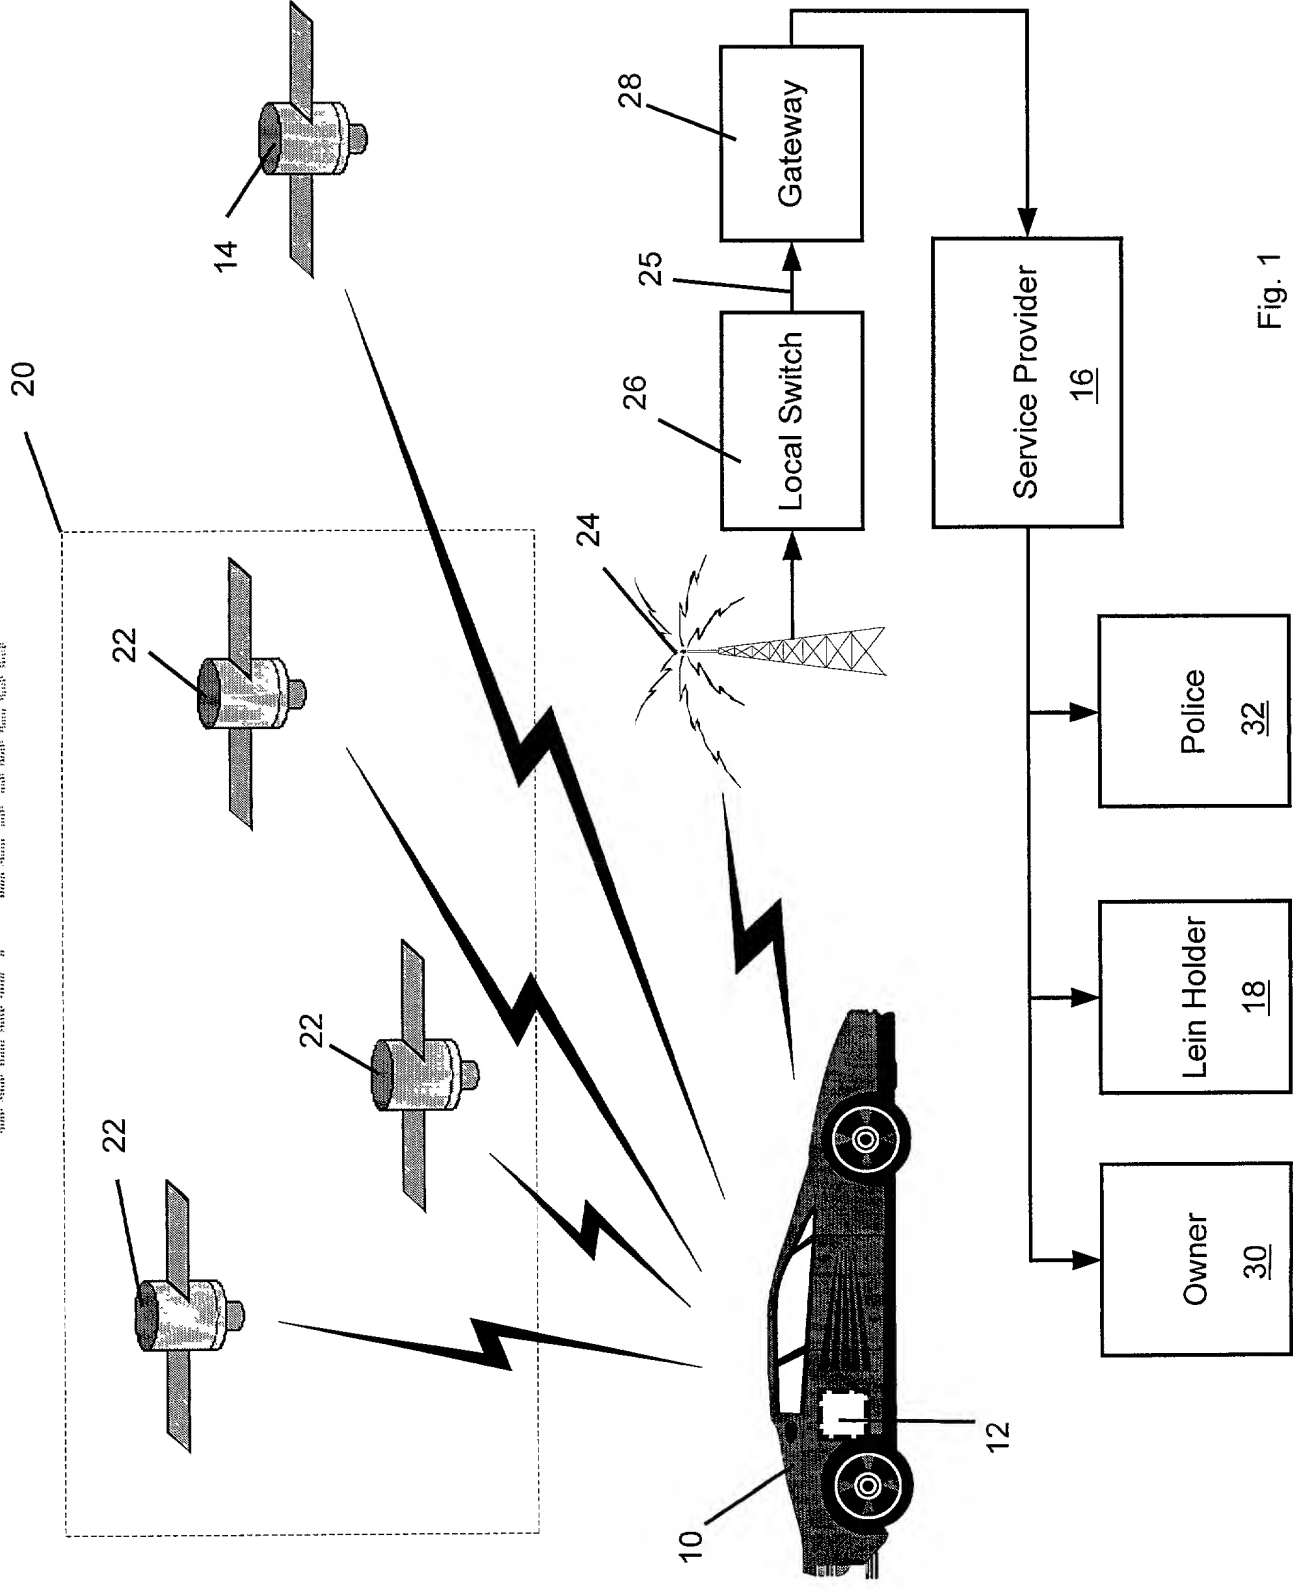


Fig. 1

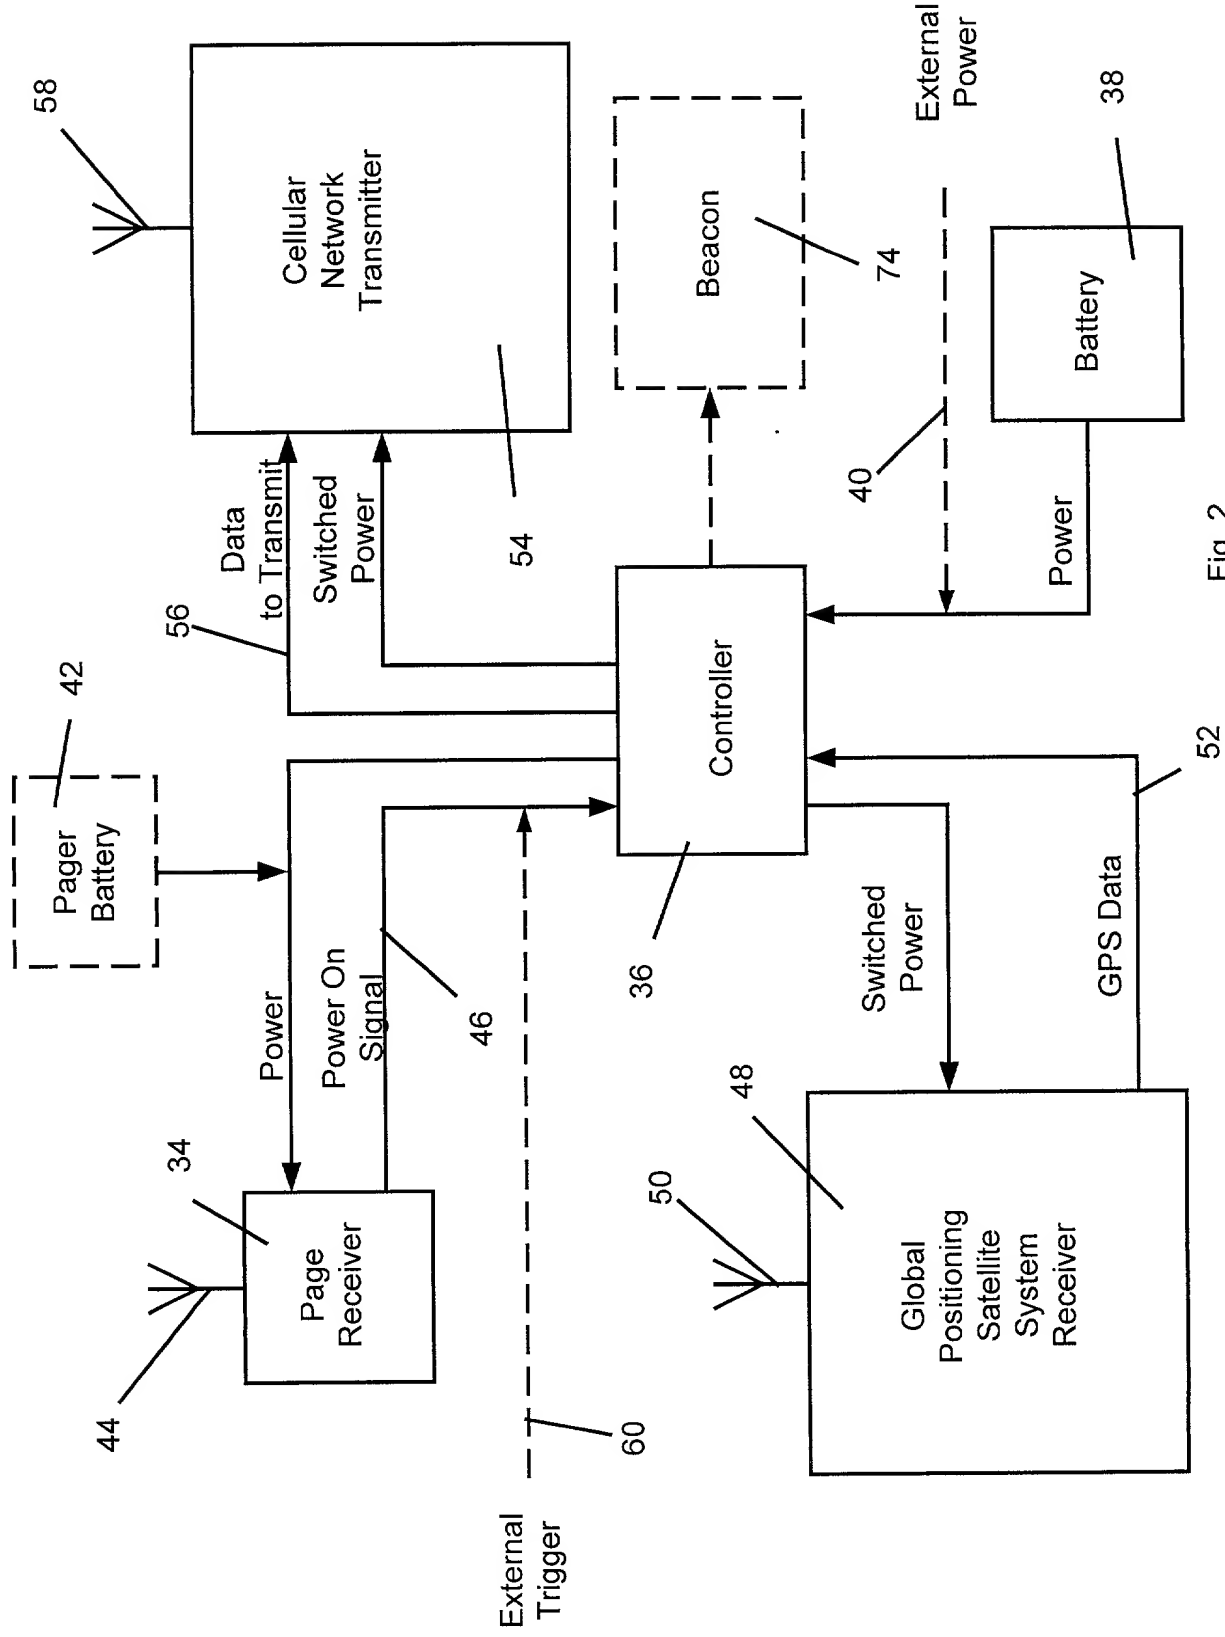


Fig. 2

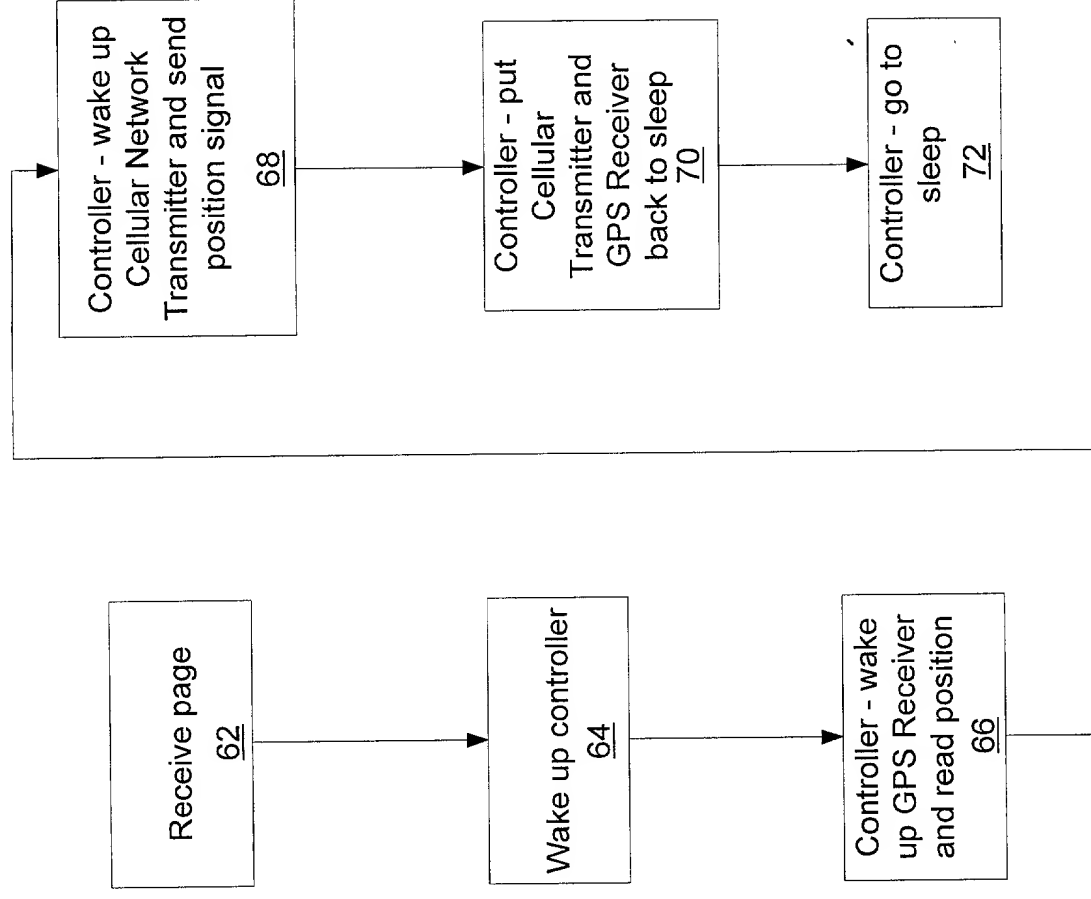


Fig. 3

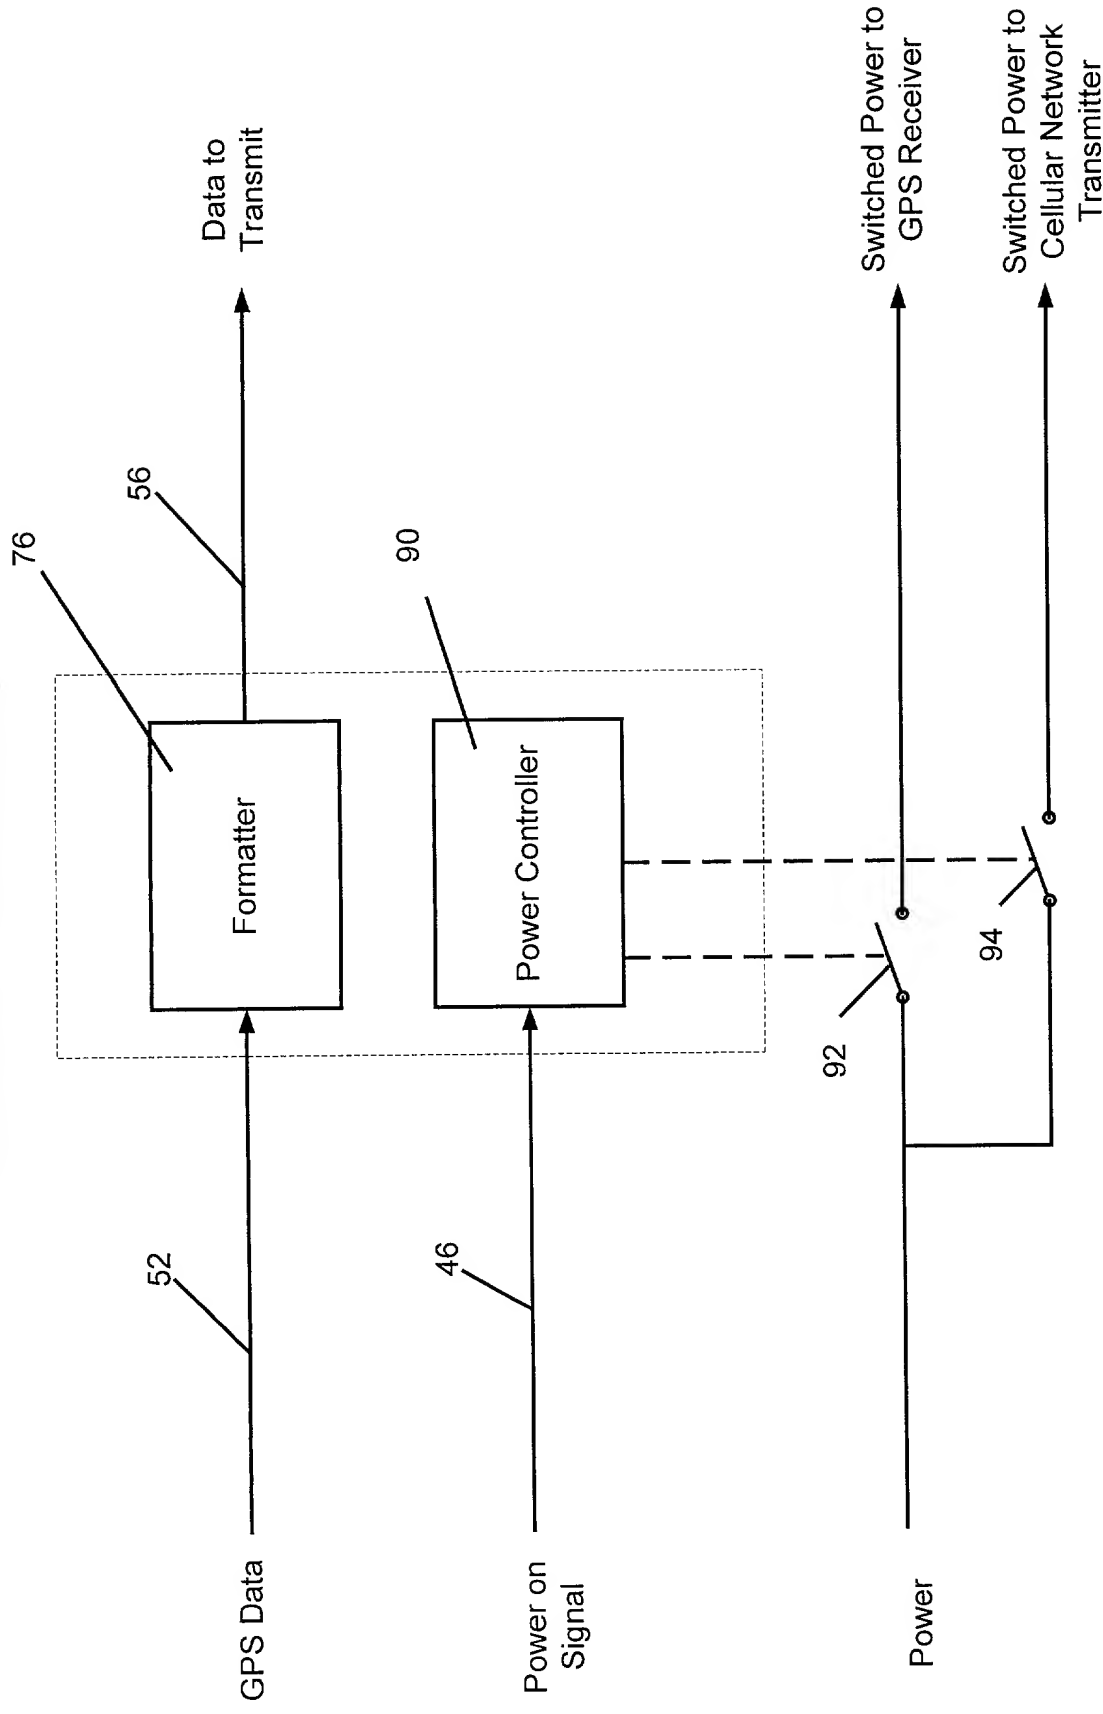


Fig. 4

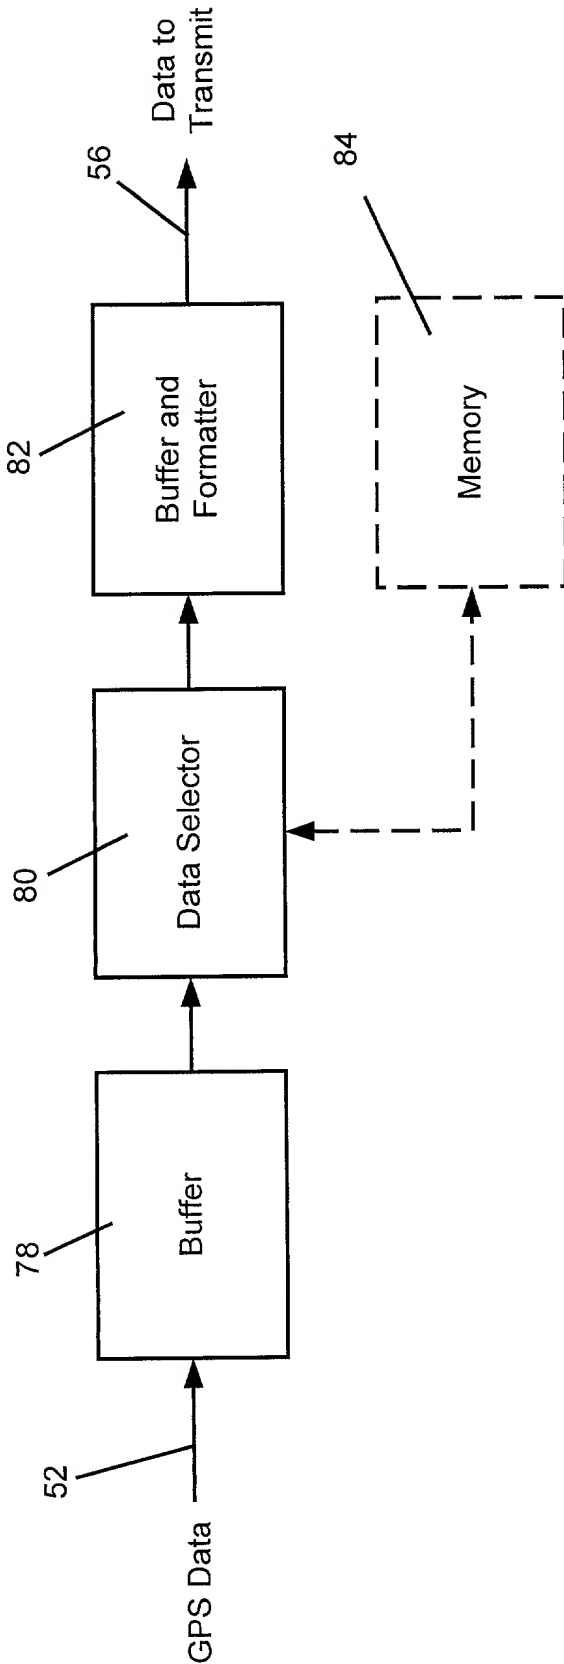


Fig. 5

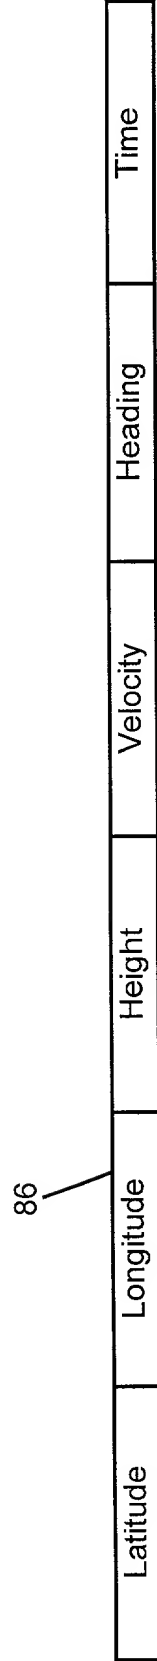


Fig. 6

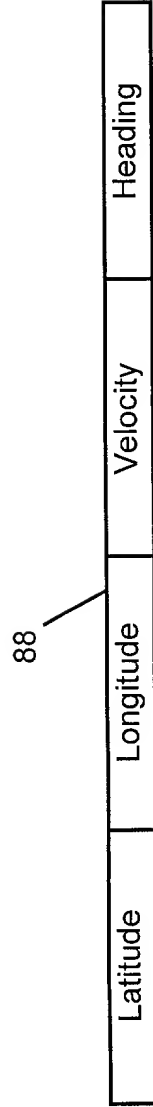


Fig. 7



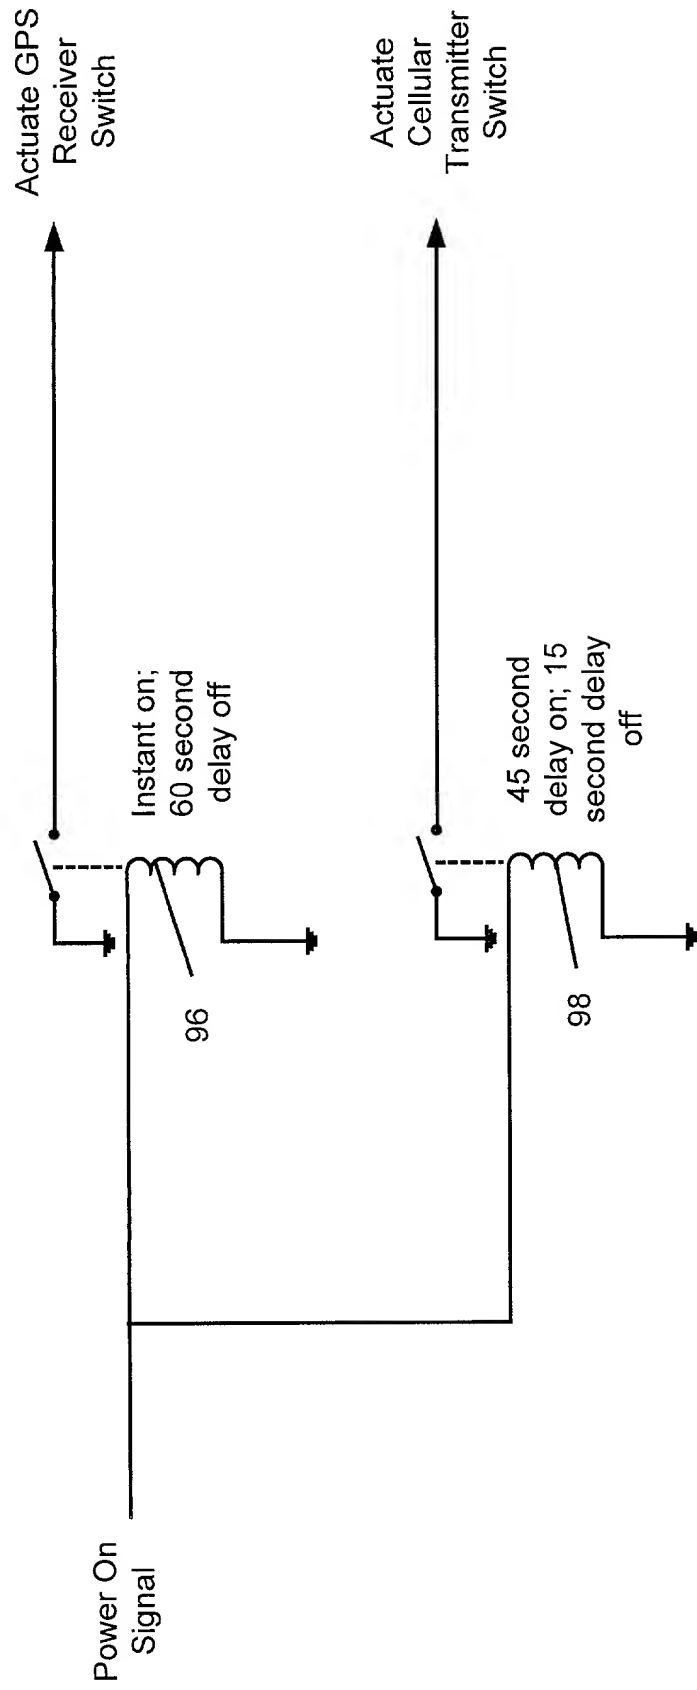


Fig. 8

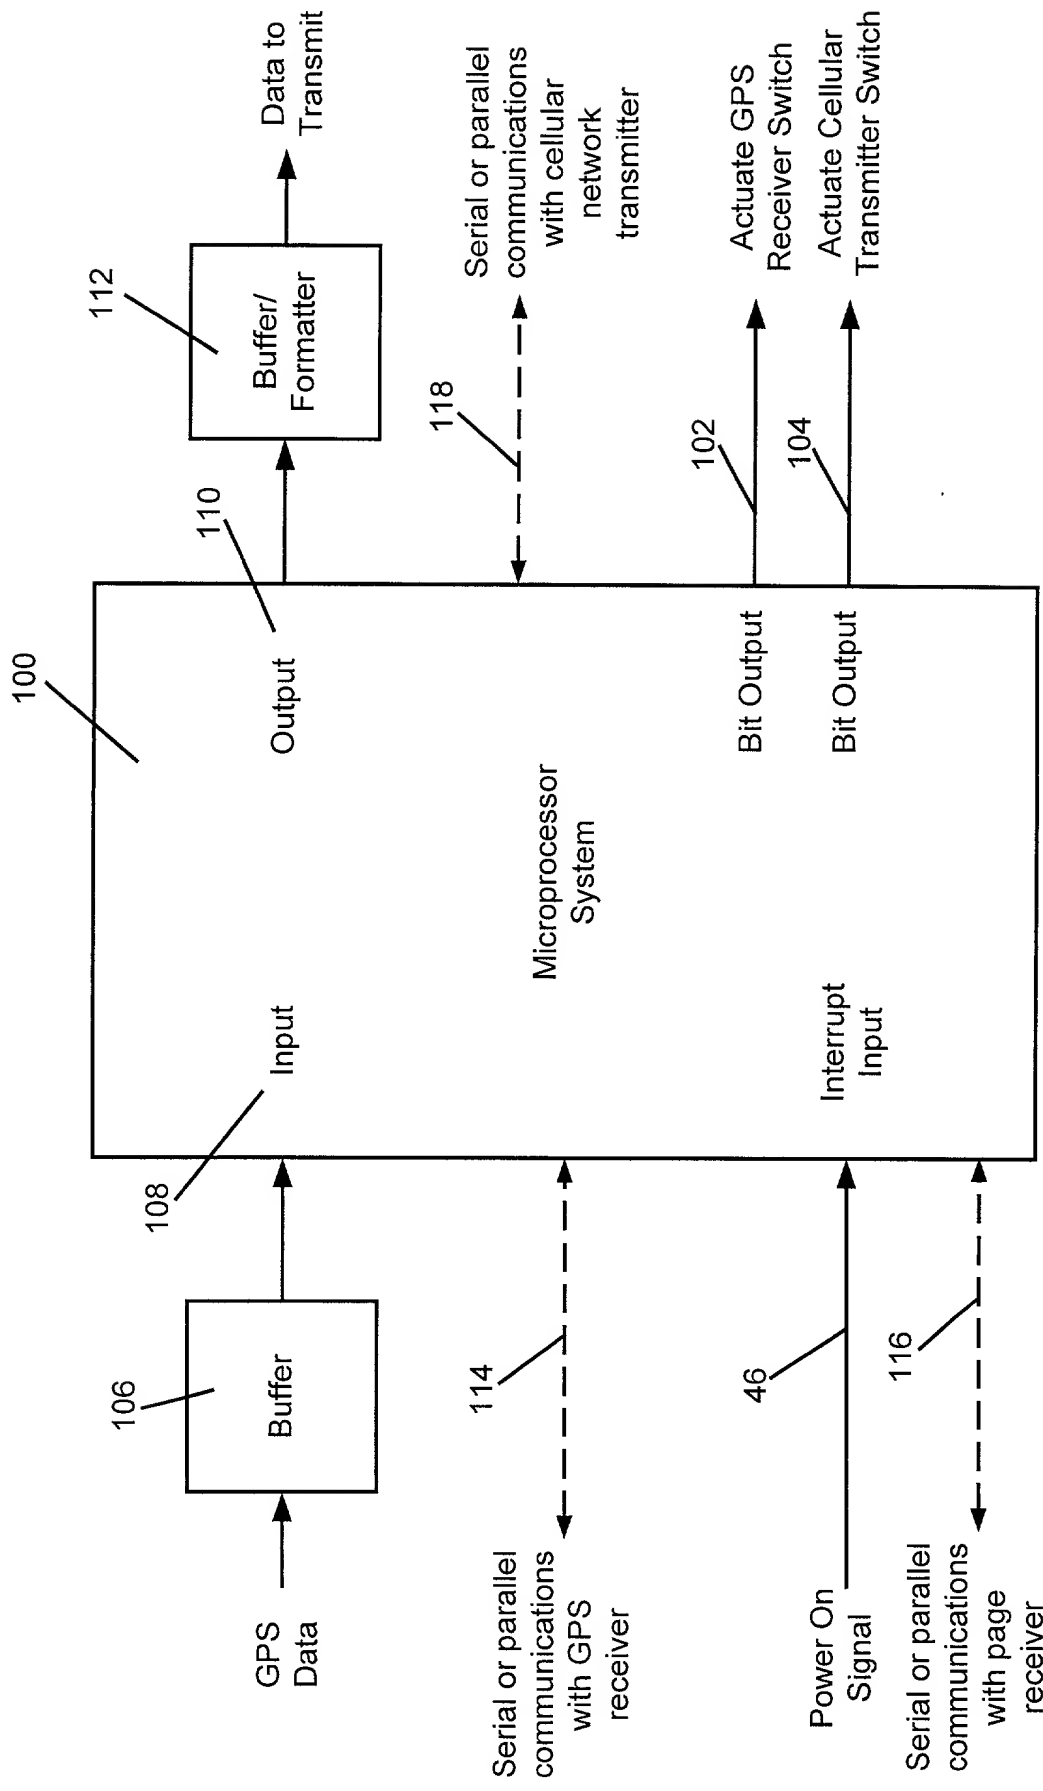


Fig. 9

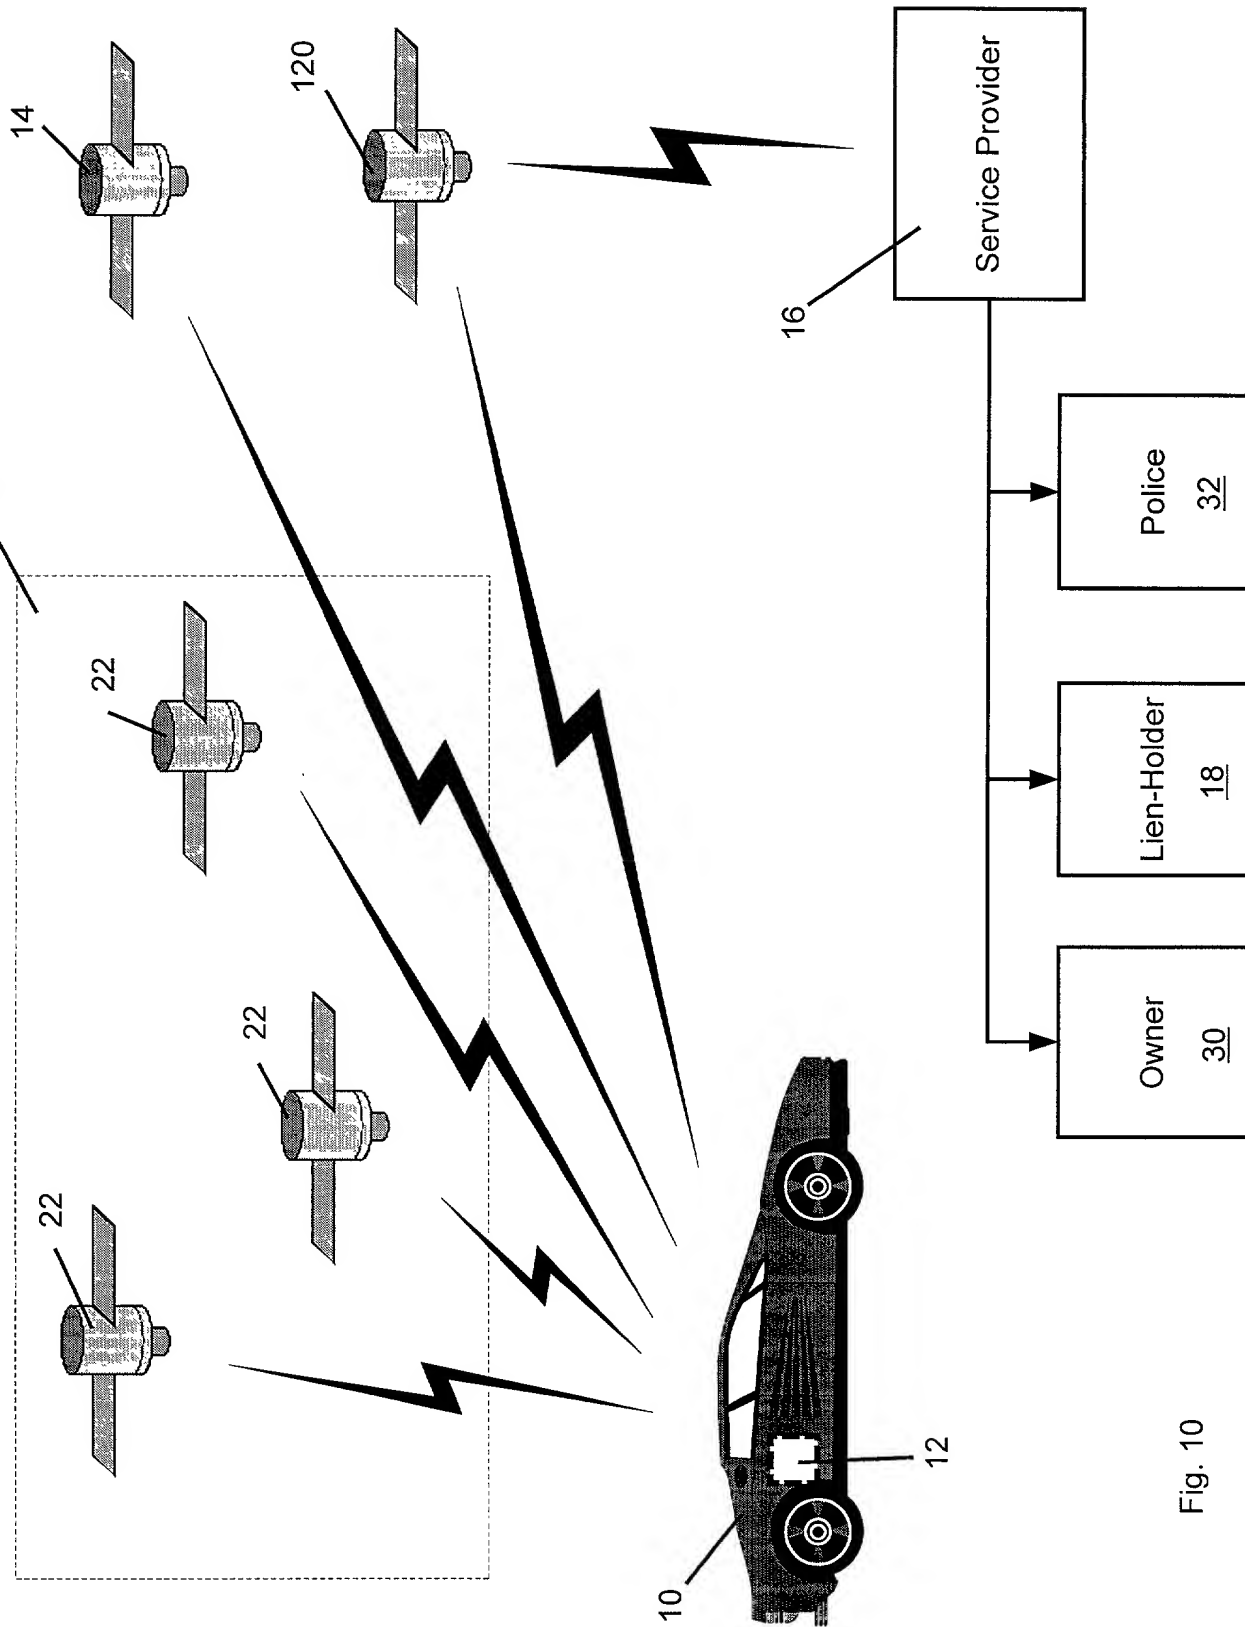


Fig. 10

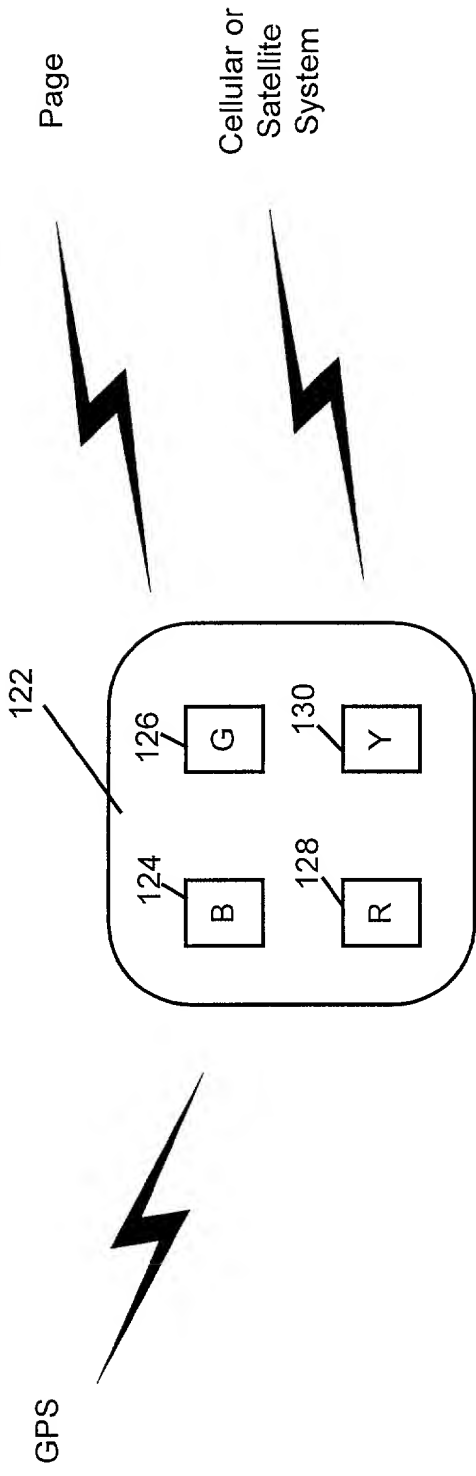


Fig. 11

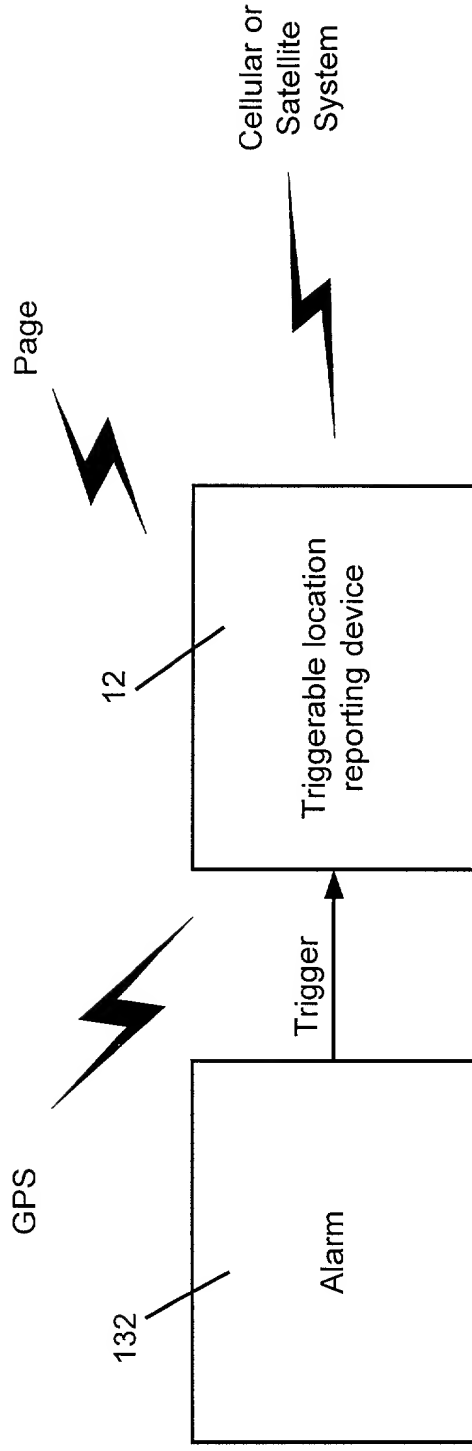


Fig. 12

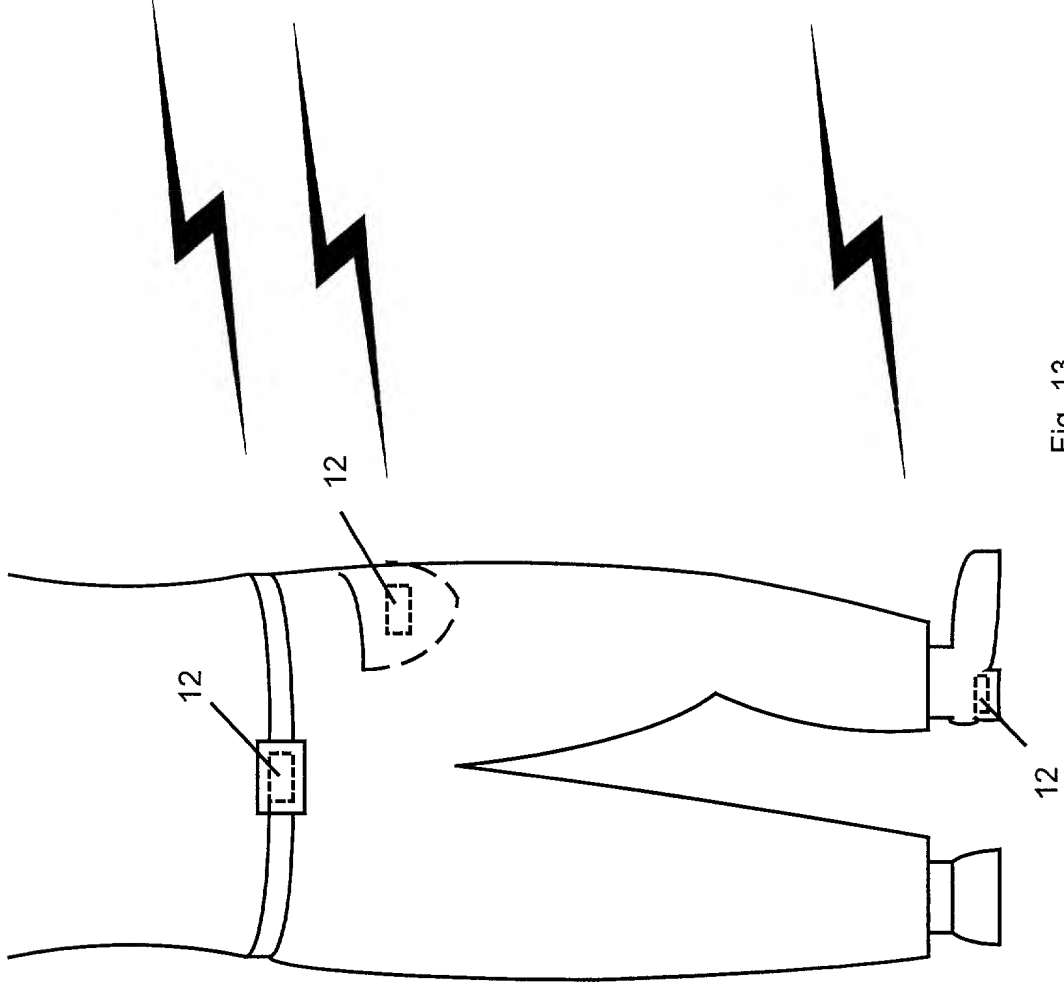


Fig. 13

Docket No.

30.1

# Declaration and Power of Attorney For Patent Application

## English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### APPARATUS AND METHOD FOR TRIGGERABLE LOCATION REPORTING

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

\_\_\_\_\_  
(Application Serial No.)


\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**Howard L. Speight, Reg. No. 37,733**

Direct Telephone Calls to: *(name and telephone number)*  
Howard L. Speight, telephone (713) 465-1889, facsimilie (713) 465-8018

Full name of sole or first inventor <b>Alvin C. Allen, Jr.</b>	
Sole or first inventor's signature 	Date <b>12-4-98</b>
Residence <b>Route 1, Box 79J, Liberty, Texas 77575</b>	
Citizenship <b>USA</b>	
Post Office Address	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	